

OnGuard & XProtect Access

Architecture & Design

Please refer to the compatibility matrix documents and user guides available at the following links:

(XProtect Access) – <https://download.milestonesys.com/lenels2xpa/>

Rules of design

Milestone and OnGuard integration performance thresholds and corresponding design recommendations:

Technology System	Single Server	Total System Size	Total Servers
XProtect (VMS)	100 cameras/NVR.	5,000 cameras per Management Server.	100 NVRs per Management Server.
XProtect (Access)	100 Events/sec sustained & 300 Events/sec peak.	1x XProtect Access to OpenAccess connection per XProtect Management Server.	No limit – Milestone Federated Architecture or Interconnect features allow XProtect to scale, and regionalized architecture allow OnGuard to scale.
OnGuard (OpenAccess)	1x OpenAccess connection per OnGuard Application Server.	1x XProtect Access integration per OnGuard Application Server.	No limit - Regionalized architecture allows unlimited scalability.


** These thresholds are only suggestions related to the XProtect Access integration which may contradict other documented information from Milestone and OnGuard. It is highly recommended to contact your Milestone and OnGuard engineering team to calculate actual system performance.*

XProtect Access – performance thresholds

1. 100 cameras or less per Recording Server.
 - 5000 cameras per XProtect Management Server.
2. 100 events per second on the XProtect Event Server.
 - Peaks up to 300 events per second.
3. One OpenAccess to a single XProtect Access connection.
4. One XProtect Access connection to one OnGuard OpenAccess Server.

Scaling beyond this limit only becomes possible by adding individual one-to-one connections with a regionalized OnGuard.

Multiple concurrent connections to OpenAccess can lead to resource competition, performance degradation, and system failure.

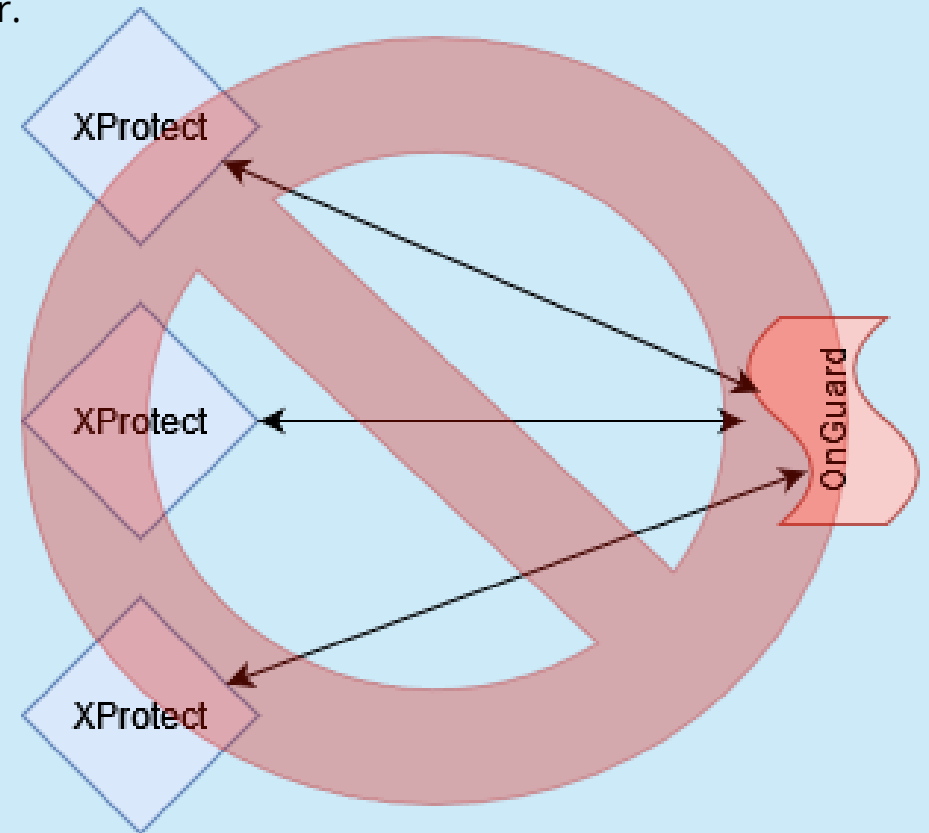


START HERE (1)

1-100 cameras and 1-300 events per second

As system design scales, data flow, port, and connection details do not change - data flow is removed to focus on required components.

The XPA Plugin on the Milestone XProtect server is a plugin that runs within the Event Server process. Communication and data moving between the XPA Plugin and the Event Server doesn't traverse the network. XPA Services can run on the OnGuard Application Server or a stand-alone server in the network.

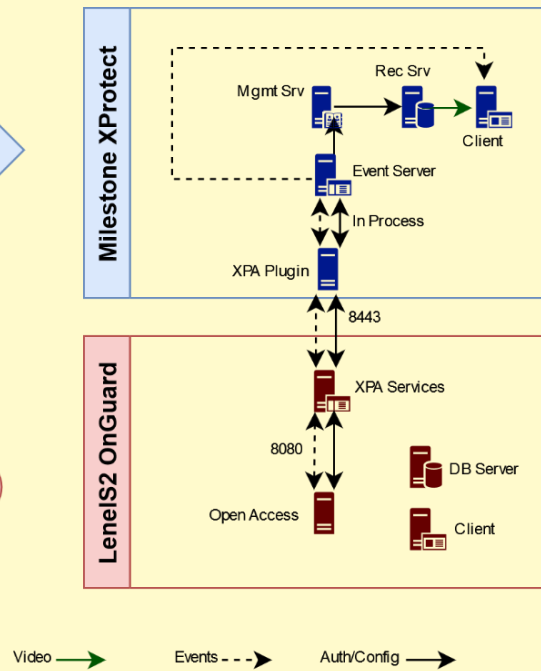


(2)



Unlimited cameras - 1-300 events per second

Single OnGuard Application Server with three extra XProtect servers: one additional Management Server with its own Event Server and Recording Server, and two extra stand-alone Recording Servers.

To view all cameras in the same client session, Milestone Federated Architecture or Interconnect is required.

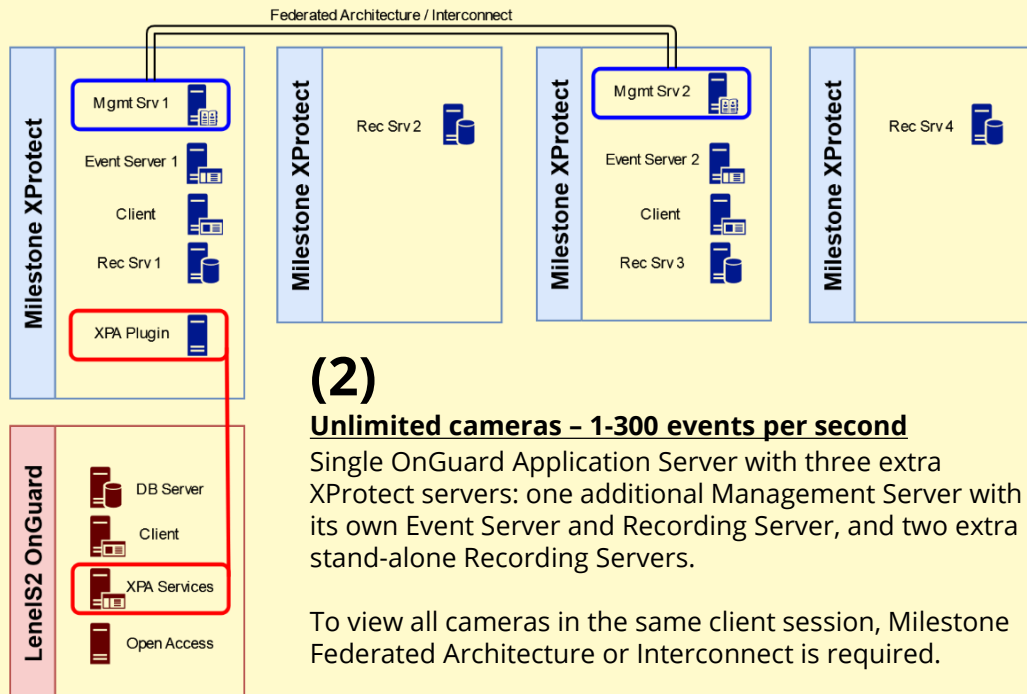

XProtect Access – solution design

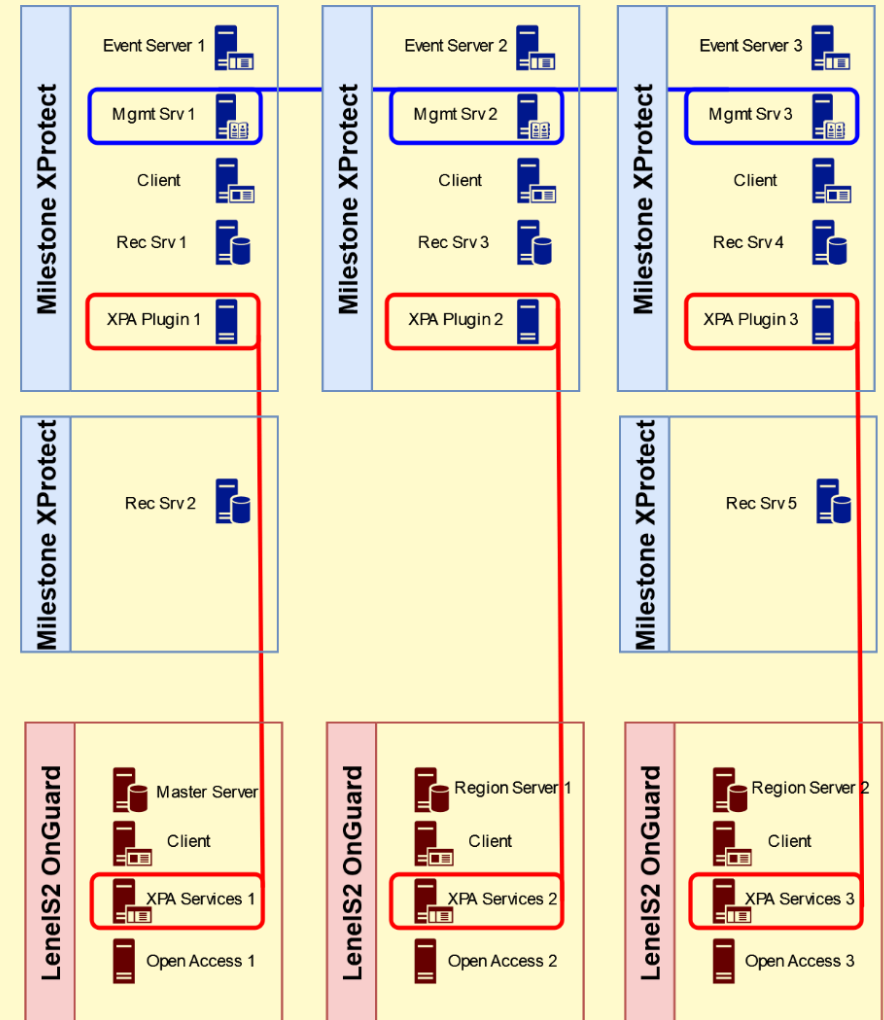

(3)

Unlimited cameras, unlimited events per second

Each column represents one local pair of XProtect and OnGuard servers.


OnGuard performance note:

One OpenAccess connection per OnGuard application.

Open Video Ownership

The Open Video integration is owned and supported by LenelS2. Milestone Systems does not provide any support for the Open Video integration. This document is for information only.

Combined solution design (OpenVideo & XProtect Access)

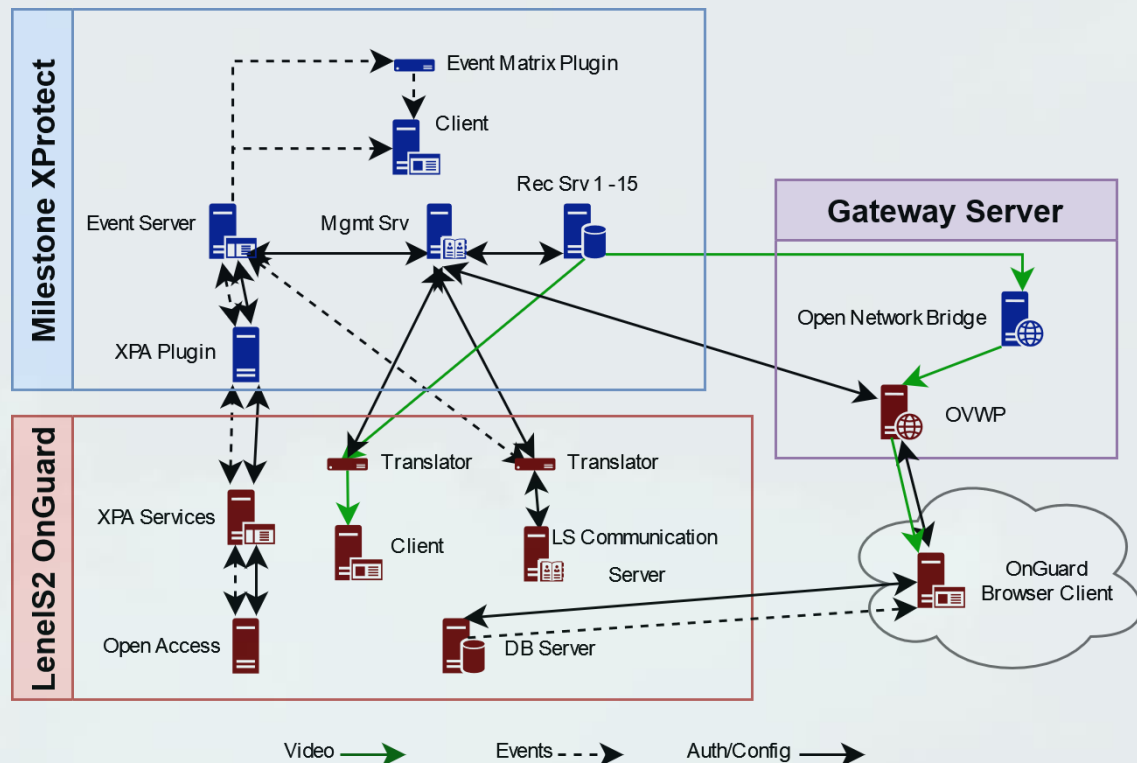

Combined – performance limitations - XProtect Access and OpenVideo

- 60 cameras or less per Recording Server.
 - 900 total cameras per XProtect Management Server.
- Limit memory consumption to 1.5 GB on an operational LS Communication Server.
 - 15 Recording Servers per LS Communication Server and XProtect Management Server.
- 100 events per second average, with discrete peaks of 300 events per second is the limitation of the Milestone Event Server.
- It is recommended that the OpenAccess connections are limited to one single XProtect Access connection.
- The final limiting factor on this system is CPU utilization on the XProtect Management Server when the “Get Configuration” operation is in process connecting the XProtect system to OnGuard.

Unlimited cameras, Recording Servers, and events per second

Milestone performance:

- <60 cameras per Recording Server.
- >300 events per second – system wide.
- <100-300 events per second per Event Server.
- <100% CPU during Get Configuration – on each Management Server.

OnGuard performance:

- <1.5GB memory on each LS Communication Server.
- Only one OpenAccess integration with XProtect Access.

